


### Overview

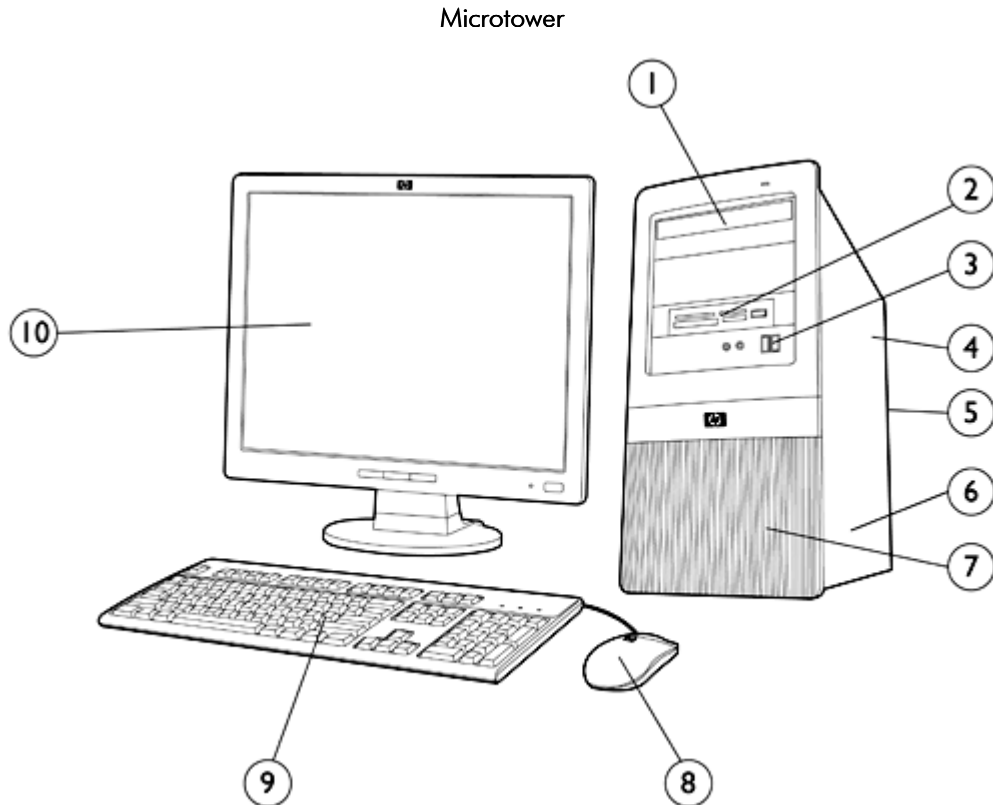

- |  |   |
|--|---|
| 1. (2) external 5.25" drive bays for optional optical drives                               | 6. (1) full-height PCI 2.3 slot, (2) PCIe x1 slots, (1) PCIe x16 slot |
| 2. (1) external 3.5" drive bay for optional media reader\                                  | 7. (2) internal 3.5" drive bays                                       |
| 3. (2) USB 2.0 ports, audio ports  | 8. HP USB 2-Button Optical Scroll Mouse                               |
| 4. 300-watt max power supply   | 9. HP USB Value Standard Keyboard                                     |
| 5. (4) USB 2.0 ports, (2) PS/2, (1) RJ-45, (1) VGA, (1) audio in – (1) audio out – (1) MIC | 10. Monitor (sold separately)   |

### Overview

#### At A Glance

- Intel® Core™ 2 processors, Intel Pentium® processors, or Intel Celeron® processors
- Choice of operating systems:
  - Genuine Windows Vista Business 32
  - Genuine Windows Vista Home Premium 32
  - Genuine Windows Vista Home Basic 32
  - Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed
  - FreeDOS
- Intel G31 Express Chipset
- Intel I/O Controller Hub 7 (ICH7)
- Intel Graphics Media Accelerator
- PCI and PCI Express I/O buses
- Serial ATA controller
- USB 2.0 support
- Realtek RTL8101E 10/100 Fast Ethernet controller
- Choice of hard drives and optical drives
- DDR2 SDRAM system memory
- Protected by HP Services. Terms and conditions vary by country. Certain restrictions and exclusions apply.

### Standard Features and Configurable Components

#### Processor and Speed

One of the following

##### Intel Celeron Processors

Intel Celeron 430 Processor (1.80-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron 440 Processor (2.00-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron 450 Processor (2.2-GHz, 512K L2 cache, 800-MHz FSB)

##### Intel Celeron Dual-Core Processors

Intel Celeron Dual Core E1200 Processor (1.60-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron Dual Core E1400 Processor (2.00 GHz, 512 KB L2 cache, 800 MHz FSB)

Intel Celeron Dual Core E1500 Processor (2.2-GHz, 512K L2 cache, 800-MHz FSB)

Intel Celeron E1600 Processor (2.4-GHz, 512K L2 cache, 800-MHz FSB)

##### Intel Pentium Dual-Core Processors

Intel Pentium Dual Core E2220 Processor (2.40 GHz, 1 MB L2 cache, 800 MHz FSB)

Intel Pentium Dual Core E5200 processor (2.50 GHz, 2 MB L2 cache, 800 MHz FSB)

Intel Pentium Dual Core E5300 Processor (2.6-GHz, 2MB L2 cache, 800-MHz FSB)

Intel Pentium Dual Core E5300 (HE) Processor (2.6 GHz, 2MB L2 cache, 800 MHz FSB)

Intel Pentium Dual Core E5400 Processor (2.7 GHz, 2MB L2 cache, 800 MHz FSB)

Intel Pentium E6300 Processor (2.80-GHz, 2MB L2 cache, 800-MHz FSB)

##### Intel Core 2 Duo Processors

Intel Core 2 Duo E7300 Processor (2.66-GHz, 3-MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E7400 Processor (2.80-GHz, 3 MB L2 cache, 1066-Mhz FSB)

Intel Core 2 Duo E7500 Processor (2.93 GHz, 3 MB L2 cache, 1066 Mhz FSB)

Intel Core 2 Duo E7500 (HE) Processor (2.93 GHz, 3 MB L2 cache, 1066 MHz FSB)

Intel Core 2 Duo E7600 Processor (3.06-GHz, 3 MB L2 cache, 1066-Mhz FSB)

Intel Core 2 Duo E8400 Processor (3.00-GHz, 6-MB L2 cache, 1333MHz FSB)

Intel Core 2 Duo E8500 Processor (3.16-GHz, 6-MB L2 cache, 1333MHz FSB)

Intel Core 2 Duo E8600 processor (3.33 GHz, 6 MB L2 cache, 1333 MHz FSB)

**NOTE:** Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families.

### Standard Features and Configurable Components

#### Operating Systems and Application Software (availability varies by region)

Genuine Windows Vista Business 32\*  
Genuine Windows Vista Home Premium 32\*  
Genuine Windows Vista Home Basic 32\*  
Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed  
Free DOS

\* Certain Windows Vista product features require advanced or additional hardware. See <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit <http://www.windowsvista.com/upgradeadvisor>

Microsoft Office 2007 Basic  
Microsoft Office 2007 Small Business  
Microsoft Office 2007 Professional  
Mozilla Firefox for HP Virtual Solutions  
HP Credential Manager  
HP Power Manager 2.0  
HP Total Care Advisor  
HP Backup and Recovery Manager  
Roxio Easy Media Creator 10\*\*  
Intervideo WinDVD 8\*\*  
McAfee Total Protection Anti-Virus\*\*\*  
PDF Complete  
Sun Java Runtime Environment

\*\* Supporting software available with certain optical drive configurations

\*\*\* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

---

#### Hard Drives

80-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)  
160-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)  
320-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)  
500-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)

---

#### System Memory

1-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 1GB)  
2-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (2 x 1GB)  
2-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 2GB)  
3-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 2GB, 1 x 1GB)  
4-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (2 x 2GB)

---

### Standard Features and Configurable Components

**Storage –**

One or more of the following (see Storage section below)

**Media Reader**

HP 22-in-1 Media Card Reader

**Optical Drives (Serial ATA)**

SATA DVD-ROM Drive

SATA SuperMulti LightScribe DVD Writer Drive

**Input Devices****Keyboard**

HP USB Value Standard Keyboard

**Mouse**

HP USB 2-Button Optical Scroll Mouse

**Audio**

Realtek ALC662 High Definition audio codec

3D audio compliant and HD Audio compatible

**Communication**

Integrated Realtek 8101E 10/100 Ethernet Controller

**Graphics**

Intel Graphics Media Accelerator – integrated

ATI Radeon HD 2400XT (256MB DH) PCIe x16 – optional

NVIDIA GeForce GT230 1.5GB PCIe x16

NVIDIA GeForce 310 DP PCIe x16 Graphics Card

ATI Radeon HD 4550 Dual Head PCIe x16 Graphics Card

ATI Radeon HD 4650 PCIe x16 Graphics Card

**Miscellaneous**

HP Serial/Parallel PCI Card (full height)

### System Details

#### Base Unit

- Micro ATX microtower chassis, including power supply and front bezel
- Five (5) drive bays and four expansion slots
- Microsoft operating system CD – optional
- Active type heatsink
- 92 x 92 x 25 mm chassis fan
- System board with Intel G31 Express chipset, Intel I/O Controller Hub 7 (ICH7), Realtek RTL8101E 10/100 Ethernet controller, Intel GMA graphics, and Realtek audio, (1) full-height PCI 2.3 slot, (2) PCI Express x1 slots, (1) PCI Express x16 slot, (2) DDR2 DIMM memory slots, (4) Serial ATA data connectors
- Product documentation on CD
- HP system restore CD – optional
- Power cord

#### Slots

##### PCI

One (1) full-height PCI 2.3 slot on PCA  
Two (2) full-height PCI Express x1 slots on PCA  
One (1) full-height PCI Express x16 slot on PCA (for graphic cards)

##### Memory Expansion

Two (2) DDR2 SDRAM DIMM slots (4 GB maximum memory support)

**NOTE:** For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

#### Bays

##### Internal

Two (2) 3.5"

##### External

Two (2) 5.25"  
One (1) 3.5"

#### USB Support

EHCI high-speed USB 2.0 controller

Two (2) front ports; Four (4) rear ports, Two (2) internal ports on motherboard

#### Interfaces (Legacy)

One (1) PS/2 keyboard port  
One (1) PS/2 mouse port  
One (1) analog VGA video port  
One (1) line in; one (1) line out; one (1) mic in  
One (1) RJ45 network port

#### Weight & Dimensions

##### Chassis Dimensions (H x W x D)

14.38 x 6.50 (7.09 w/bezel) x 14.69 in  
365 x 165 (180 w/bezel) x 373 mm

##### Packaged Dimensions (L x W x H)

19.13 x 21.875 x 10.13 in  
490 x 556 x 257 mm

##### System Weight

22.4 lb (10.2 kg)

##### Shipping Weight

30.8 lb (14.0 kg)

### System Details

Technology and Features	Memory Type	PC2-6400 DDR2 SDRAM (800MHz) non-ECC Up to 4-GB maximum system memory supported
	<b>NOTE:</b> For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.	
	Hard Drive Interfaces Supported	Serial ATA

Chassis	Front Panel	Power button (located on top of chassis) Power On LED HDD Activity LED
	Cooling Solutions Supported	Power Supply Fan (variable speed) Active heatsink (variable speed) Chassis fan
	Slots Supported	Four (4) full-height expansion slots
	Front I/O	Two (2) USB 2.0 ports
	Rear I/O	Standard Micro ATX I/O connectors, including four (4) USB 2.0 ports
	Drive Bays	Two (2) 5-1/4" external One (1) 3-1/2" external Two (2) 3-1/2" internal
	Internal Speaker	N/A
	Security	Padlock loop Kensington Lock Support Optional USB Port Disable at factory (user configurable via BIOS)
	Power Supply	300-watt ATX Power Supply – PFC/non-PFC with a 115v/230v line switch (varies by country/region)

### Unit Environment and Operating Conditions

#### General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 4 in (10.2 cm) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating	50° to 95° F (10° to 35° C)
	Non-operating	-22° to 140° F (-30° to 60° C)
Relative Humidity	Operating	10% to 90% (non-condensing at ambient)
	Non-operating	5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating	10,000 ft (3048 m)
	Non-operating	30,000 ft (9000 m)

### System Details

**NOTE:** Operating temperature is de-rated 1.0 deg C per 1000 ft (300 m) to 10,000 ft (3000 m) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

System Board	Processor	Socket T; LGA775 industry standard Micro ATX form factor Support single Intel Core 2 Duo, Celeron 4xx or Dual Core
	PWM	ISL6312 – 3 Phase
	Chipset	Intel G31 Express Intel I/O Controller Hub 7 (ICH7)
	Super I/O	Fintek F71882FG
	Front Side Bus Frequency	800/1066/1333 MHz
	Memory	DDR2 SDRAM 2 x DIMM slots
	Clock Generator	RTM 876-665
	Integrated Graphics	Intel Graphics Media Accelerator (GMA)
	Audio	Realtek ALC662 HD Audio compatible codec with two channel audio 3D audio
	LOM	Realtek RTL8101E 10/100 Fast Ethernet controller
	Storage	Four Serial ATA interfaces
	Expansion Slots	1 x PCI 2.3 slot 2 x PCI Express x1 slots 1 x PCI Express x16 slot
	BIOS	SPI EEPROM
	Industrial Standard	PCI 2.3 compliant USB 2.0
	Rear Side I/O Ports	1 x PS/2 keyboard port 1 x PS/2 mouse port 4 x USB 2.0 ports 1 x RJ-45 10/100 port 1 x D-sub 15 pin analog VGA port 3 x audio ports
	On Board I/O Interfaces	1 x ATX power connector 1 x +12V power connector 1 x Floppy connector 1 x Front panel connector, Switch, LED (ON/Flash/OFF) 2 x Fan headers for CPU, chassis, with voltage/fan speed control 1 x header to support 2 USB 2.0 ports at front side 1 x header to support 2 front (Headphone/Mic) audio ports 1 x header to support USB media reader
	Board Size	Micro-ATX, PCB Size: 9.6 x 8.5 in (24.38 x 21.86 cm) 4-layer PCB with green color



### System Details

#### Additional Features

- Bootable without keyboard, mouse or monitor
- Keyboard/mouse/USB wake up
- Support S1, S3, S4 and S5
- ACPI status
- Hardware monitor capability
- CPU fan speed control

#### Network Interface

Integrated Realtek 8101E  
10/100 Fast Ethernet  
Controller

#### Hardware Highlights Features

PCIe x1 interface  
10-Mbps and 100-Mbps operation  
Crossover detection and auto-correction  
Wake-on-Lan and remote Wake-up (Wake-on-LAN supported from S1, S3, S4 only. Not supported from S5)

#### Power Supply

- ATX Power Supply - Passive PFC/non-PFC with a 115v/230v line switch
- Passive Power Factor Correction (PFC) – with line switch set to 230V - No PFC in 115V line switch position
- 90 to 140VAC, or 180 to 264VAC operating voltage range
- 100 to 127VAC, or 200 to 240VAC rated voltage range
- 50-60 Hz rated line frequency
- 47-63 Hz operating line frequency range
- 300 watt maximum rated power
- 80-mm power supply fan – variable speed for optimum acoustics

#### Power Conservation 'Energy Saver'

- APM 1.2 support
- Screen blanking
- Hard drive 'Idle' mode
- System Idle mode
- ~2 watt power consumption in ES mode – suspend to RAM (S3) (instantly available PC)
- Processor/Cache memory power-down (S3)

#### System Environmental Specs

- Values are subject to change without notification and are for reference only.
- Performance of system, options, and ancillary equipment will vary depending on the system configuration.
- Levels presented do not account for non-HP/Compaq installed hardware.

#### Ambient Air Temperature Operating

50° to 95°F (10° to 35°C) at sea level with an altitude de-rating of 1.0°C per every 1000 ft (300 m) above sea level to a maximum of 8000 ft (2500 m), no direct sustained sunlight. Maximum rate of change is 77°F/Hr (25°C/Hr). The upper limit may be limited by the type and number of options installed.

#### Storage

-22° to 140°F (-30° to 60°C) –  
Maximum rate of change: 410°F/Hr (210°C/Hr).

### System Details

Humidity	Operating	10% to 90% relative humidity (Rh), 86°F (30°C) maximum wet bulb temperature, non-condensing
	Storage	10% to 95% relative humidity (Rh), 101.66°F (38.7°C) maximum wet bulb temperature, non-condensing
Altitude	Operating	0 to 10,000 feet (0 to 3048 meters) – This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 1,000 ft/min (304.8 m/min).
	Non-Operating	0 to 30,000 feet (0 to 9,144 meters) – Maximum allowable altitude change rate is 1200 ft/min (365.76 m/min).
Shock	Listed are the levels of shock the product can withstand with NO damage being incurred. The values represent peak input acceleration during a 2 to 3 ms half-sine shock pulse, 11 ms trapezoidal shock pulse.	
	Non-Operating	35G's (Half-sine Shock) 35G's (Trapezoidal Shock)
Vibration	Listed are the levels of vibration the product can withstand with NO damage being incurred. The values represent a flat random vibration input acceleration profile across the given frequency range.	
	Operating	Random vibration at 5Hz@0.00025G <sup>2</sup> /Hz, 10Hz@0.01G <sup>2</sup> /Hz, 100Hz@0.01G <sup>2</sup> /Hz, 300Hz@0.00001G <sup>2</sup> /Hz 5Hz to 300Hz, (0.25G's nominal).
	Non-Operating	Random vibration at 0.008G <sup>2</sup> /Hz, 10Hz to 500Hz, (2 Grms nominal).
Acoustic Noise	Listed are the declared A-WEIGHTED SOUND POWER LEVELS (LWAd) and declared average desktop seated operator position A-WEIGHTED SOUND PRESSURE LEVELS (LpAm) when the product is operating in a 73.4°F (23°C) ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	IDLE (Fixed disk drive spinning)	LWAd = 4.3 Bels, Desktop Average LpAm = 32dBA
	FIXED DISK (Random write)	LWAd = 4.8 Bels, Desktop Average LpAm = 37dBA
	CD-ROM (Sequential Reads)	LWAd = 5.0 Bels, Deskside Average LpAm = 39dBA

### System Details

#### Service and Support

On-site Warranty<sup>Note 1</sup>: One-year (1-1-1) limited warranty delivers one year of on-site, next business-day<sup>Note 2</sup> service for parts and labor and includes free telephone support<sup>Note 3</sup> 24 x 7. Global coverage<sup>Note 2</sup> ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. One-year onsite and labor are not available in all countries.

**NOTE 1:** Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region

**NOTE 2:** On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

**NOTE 3:** Technical telephone support applies only to HP-configured Compaq and third-party HP-qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

### After-Market Options

Communications	<b>NICs</b>	
	Intel Pro 1000 CT PCIe Gigabit NIC	EH352AA
	<b>Wireless LAN</b>	
	HP Wireless 802.11 b/g/n PCIe Card	FH971AA
	<b>Modems</b>	
	LSI PCIe x1 Hi-Speed 56K International SoftModem	FH970AA
<hr/>		
Hard Disk Drives	HP 500-GB SATA 3.0-Gb/s Hard Drive	PV943A
	HP 320-GB SATA 3.0-Gb/s Hard Drive	FH963AA
	HP 250-GB SATA 3.0-Gb/s Hard Drive	PY278AA
	HP 160-GB SATA 3.0-Gb/s Hard Drive	PY277AA
	HP 80-GB SATA 3.0-Gb/s Hard Drive	PY276AA
<hr/>		
Removable Storage Devices	<b>Diskette Drive</b>	
	HP 1.44-MB Internal Diskette Drive	AH053AA
	HP 1.44-MB USB Diskette Drive – External	DC141B
	HP 22-in-1 Media Card Reader	FX273AA
<hr/>		
Input Devices	HP PS/2 Standard Keyboard	DT527A
	HP USB Standard Keyboard	DT528A
	HP 2.4 GHz Wireless Keyboard and Mouse	NB896AA#xxx
	HP USB Mini Keyboard	AS601AA
	HP USB PS2 Washable Keyboard	VF097AA#XXX
	HP USB 2-Button Laser Mouse	GW405AA
	HP PS/2 2-Button Optical Scroll Mouse	EY703AA
	HP USB 2-Button Optical Scroll Mouse	DC172B
<hr/>		
Memory	HP 2-GB PC2-6400 (DDR2-800 MHz) DIMM	AH060AA
	HP 1-GB PC2-6400 (DDR2-800 MHz) DIMM	AH058AA
<hr/>		
Audio	HP Thin USB Powered Speakers	KK912AA
<hr/>		

### After-Market Options

<b>Graphics</b>	NVIDIA GeForce GT230 1.5GB PCIe x16	VH697AA
	NVIDIA GeForce 310 DP PCIe x16 Graphics Card	VG885AA
	ATI Radeon HD 2400XT 256MB DH PCIe x16 Graphics Card	KD060AA
	ATI Radeon 3470 256MB SH PCIe x16	FH972AA
	ATI Radeon HD 4550 Dual Head PCIe x16 Graphics Card	AT042AA
	ATI Radeon HD 4650 PCIe x16 Graphics Card	AR956AA
	HP DisplayPort To DVI-D Adapter	FH973AA
	HP DisplayPort To VGA Adapter	AS615AA
<hr/>		
<b>Optical Drives</b>	HP SATA DVD-ROM Drive	AH047AA
	HP SATA SuperMulti LightScribe DVD Writer Drive	GF343AA
<hr/>		
<b>Security</b>	HP Business PC Security Lock Kit	PV606AA
	Security cable with Kensington lock	PC766A
	HP Chassis Security Kit	AR639AA
	HP USB Smart Card Keyboard	ED707AA
<hr/>		
<b>Miscellaneous Accessories</b>	HP FireWire / IEEE 1394 PCI Card	PA997A
	HP Serial/Parallel PCI Card	KD062AA
	Belkin USB To Serial Adapter	EM449AA
<hr/>		
<b>Monitors</b>	All HP Monitors are supported, but the 30-inch LP3065 model requires a dual-link graphics card.	
	<b>Options</b>	
	HP Flat Panel Speaker Bar	EE418AA
	HP CRT Monitor Multimedia Base	PM552AA

### Memory

#### DDR SYNCH DRAM NON-ECC MEMORY

The Intel G31 Express chipset supports non-ECC DDR2 memory up to PC2-6400 (800-MHz). Memory upgrades are accomplished by adding single or dual DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations.

**CAUTION:** You must shut down the computer **and disconnect the power cord** before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

**HP recommends dual-channel symmetric configurations for maximum performance.**

For best performance, add the same amount of total memory to each channel and do not mix speeds. For dual-channel symmetric performance, the total amount of memory in each channel must be equal. If speeds are mixed, speed will default to the slowest DIMM.

#### STANDARD MEMORY

1-GB, 2-GB, or 4-GB DDR2 SYNCH DRAM


#### OPTIONAL MEMORY UPGRADES

Supports up to 4 GB of DDR2 SYNCH DRAM. Not all memory configurations possible are represented below.

**NOTE:** For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

DIMM Size	Slot 1	Slot 2
1-GB	1-GB	
2-GB (dual-channel symmetric)	1-GB	1-GB
3-GB	2-GB	1-GB
4-GB (dual-channel symmetric)	2-GB	2-GB

Storage

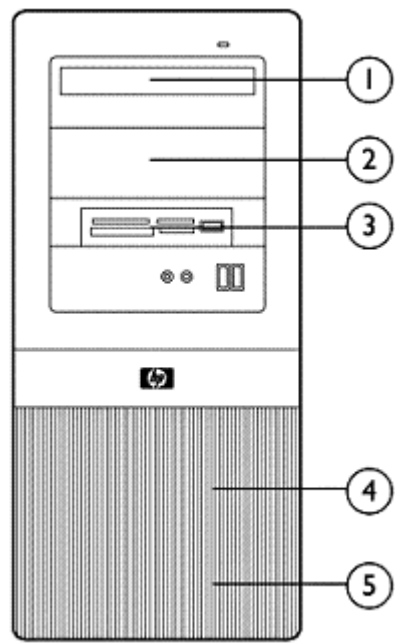

## HP Compaq dx2420 Microtower Business

	Maximum Quantity Supported	Position Supported	Controller
Drive Support			
Media Reader	1	3	Internal USB 2.0 port
DVD-ROM Drives	2	1, 2	SATA
SuperMulti LightScribe DVD Writer Drives	2	1, 2	SATA
3.5" Serial ATA Hard Drives	2	4,5	SATA

Technical Specifications - Audio

Integrated Realtek ALC662 Audio	Type	Integrated
	HD Audio compatible	Yes
	codec	5:1 channel
	Sampling	Supports 48/96 KHz
	Audio Jacks	Mic-In
		Line-In
		Line-Out / Headphone Out
	Power Support	Digital: 3.3V
		Analog: 5V
	Other	Meets performance requirements for audio on PC99/2001 systems High-performance DACs with 97dB SNR(A-Weighting) ADCs with 90dB NR(A-Weighting)



### Technical Specifications - Communications

Integrated Realtek 8101E-GR 10/100 Fast Ethernet Controller	Controller	8101E-GR
	Memory	N/A
	Data rates supported	2.5GHz data rate with X1 link width
	Compliance	IEEE802.3, IEEE 802.3u, IEEE 802.3ab
	Bus architecture	PClexpress 1.1
	Data transfer mode	Half/Full Duplex Operation
	Hardware certifications	MS NDIS5, IPv4, IPv6, TCP, UDP
	Power requirement	100mbps (heavy traffic) TBD mW max.
		10mbps (heavy traffic) TBD mW max.
		S3 with Link TBD mW
		Link Down @S0 TBD mW
		Link Down @S3/S5 TBD mW
	Boot ROM support	EEPROM, 1Kb, 2Kb
	Network transfer rate	10/100Mbps over CAT.5
		10Mbps over CAT.3
	Dimensions	9mm x 9mm
	Management capabilities	ACPI rev 2.0, PM rev 1.1, ASPM v1.0a

### Technical Specifications - Graphics

Integrated Graphics Media Accelerator	3D/2D Controller	Microsoft DirectX® 9 based with support for Pixel Shader 2.0, 4:1 anisotropic filtering, Gaussian texture filtering, shadow maps, volumetric textures, double-sided stencil buffers, and 4 pixel pipes.
	VGA Controller	Integrated
	Bus Type	PCI Express™ x16 (If an external graphics card is installed in a PCI slot, the internal graphics can be enabled or disabled using the system's BIOS setup utility. If an external graphics card is installed in the PCI Express™ slot, the internal graphics cannot be enabled).
	RAMDAC	Integrated, 350 MHz
	Memory	Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed and system load. 8 MB is pre-allocated for graphics use at system boot time. Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.
		<b>System memory equal or greater than 512 MB</b> 8 MB pre-allocated + 248 MB DVMT = max frame buffer of 256 MB
	Controller Clock Speed	250 MHz
	Overlay Planes	Single overlay support with 5x3 filtering
	Maximum Color Depth	32 bits/pixel
	Maximum Vertical Refresh Rate	75 Hz at up to 2048 x 1536 analog, 60 Hz at up to 1920 x 1200 for flat panel, 85 Hz at up to 1400 x 1050 for digital CRT/HDTV. Varies with mode and configuration. See table below.
	Multi-display Support	Support for one CRT via the motherboard's VGA connector. Support for an additional DVI-D display via the optional DVI ADD2 card. Dual independent displays and dual synchronous (Twin or Clone mode) displays are supported.
	Graphics/Video API Support	Microsoft DirectX®9, DirectXA®, VMR9, GDI/GDI+; OpenGL® 1.4.

Resolutions Supported <sup>1</sup>	Resolution	Maximum Refresh Rate (Hz)		
		Analog Monitor	Digital Monitor	
			Flat Panel	CRT / HDTV
	640 x 480	75	60	85
	800 x 600	75	60	85
	1024 x 768	75	60	85
	1280 x 1024	75	60	85
	1400 x 1050	75	60	85
	1600 x 1200	75	60	N/A
	1920 x 1080	75	60	N/A
	1920 x 1200	75	60	N/A
	1920 x 1440	75	N/A	N/A
	2048 x 1536	75	N/A	N/A

### Technical Specifications - Graphics

All HP Monitors are supported, but the 30-inch LP3065 model requires a dual-link graphics card.

1 Modes listed are supported with a single active display. The supported mode list for multiple active displays is a subset of this list. Not all modes will support video playback and some supported modes may use software MC (motion compensation) rather than hardware MC. Not all modes will support 3D acceleration depending on the system configuration (e.g., resolution selected, size of frame buffer, number of installed memory modules, etc.).

**NOTE:** Other resolutions and refresh rates may be selectable but are not recommended.

NVIDIA GeForce GT230 1.5GB Graphics Card	Bus type	PCI Express (x16 lanes)	
	Input/Output connectors	DVI-I (DVI port supports dual-link and HDCP) VGA and HDMI	
	Board display options	Supports two displays through any combination of two of the three output ports.	
	Board configuration	<b>Specification</b>	<b>Description</b>
		Graphics Chip	NVIDIA GeForce GT230
		Core clock	500 MHz
		Memory clock	500 MHz
		Frame buffer	1.5GB DDR2
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	2048 x 1536 (analog), 2560x1600 (digital)	

Resolution	Maximum Refresh Rate (Hz)		
	Analog Connection	Digital Connection	HDMI Connection
640x480	85	60	N/A
800x600	85	60	N/A
1024x768	85	60	N/A
1280x720	85	60	60
1280x1024	85	60	N/A
1440x900	75	60	N/A
1600x1200	85	60	N/A
1680x1050	75	60	N/A
1920x1080	85	60-R*	60
1920x1200	85	60-R	N/A
1920x1440	85	N/A	N/A
2048x1536	75	N/A	N/A
2560x1600	N/A	60**	N/A

\* Max HDMI resolution is 1080p

\*\* Only supported when using a dual-link DVI connection

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish
Maximum power	75W
Compliance standards	EMC Emissions:

### Technical Specifications - Graphics

a. CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment

#### EMC Immunity:

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

NVIDIA GeForce 310 DP PCIe x16 Graphics Card	Bus type	PCI Express (x16 lanes)
	Maximum vertical refresh rate	85 Hz
	Display support	Integrated 400 MHz RAMDAC
	Display max resolution	2560x1600 digital, 2048 x 1536 analog

#### NVIDIA GeForce 310 DP PCIe x16 Graphics Card display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as the may not have been tested and qualified by HP.

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

\* Only supported when using a dual-link DVI or DP connection.

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

Board display options	Supports two displays via the DisplayPort and DVI connectors	
Board configuration	Specification	Description
	Graphics Chip	RV620
	Core clock	750 MHz
	Memory clock	500 MHz
	Frame buffer	512 MB DDR3, 64 bit wide
Audio Support (through HDMI only)	Integrated HD Audio codec supports linear PCM and Dolby® Digital (7.1) audio formats for HDMI output	
Operating systems support	Windows 7 Home Basic*, Windows 7 Home Premium*, Windows 7 Professional Edition 32*, Windows 7 Professional Edition 64*, Windows 7 Ultimate Edition 32*, Windows 7 Ultimate Edition 64*, Windows Vista Business 32†, Windows Vista Business 64†, Windows Vista Home Basic 32†, Windows Vista Home Basic 64†, Windows XP	

### Technical Specifications - Graphics

Professional or Windows XP Home 32†.

\*This system may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Windows 7 Business disk may be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order at least 25 customer systems with the same custom image

† Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit:

<http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Linux x86 and x86\_64 distributions using XFree86 or X.Org‡.

‡Linux drivers are available from ATI's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website: <http://www.hp.com/wwwolutions/linux/products/clients/> for support information.

Core power	22 W (max)
Dimensions (H x D)	2.71 in x 6.60 in (68.90 mm x 167.65 mm)
Weight	0.30 lb (134.3 g)
Option kit contents	<ul style="list-style-type: none"> <li>• NVIDIA GeForce 310 DP PCIe x16 Graphics Card with full height bracket attached</li> <li>• DVI to VGA adapter</li> <li>• Software CD with graphics drivers</li> <li>• Low profile bracket to convert the card for using in a low profile chassis</li> <li>• Warranty documentation</li> </ul>
Compliance standards	<p>EMC Emissions:</p> <p>a) FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home &amp; Office Use</p> <p>b) CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment</p> <p>c) Canadian Standard ICES-003 is equivalent to CISPR22</p> <p>d) Taiwanese Standard BSMI</p> <p>e) Japanese VCCI</p> <p>f) Australian C-Tick</p> <p>g) Korean (MIC)</p>

EMC Immunity:

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

ATI Radeon HD 2400XT  
(256MB DH) PCIe  
Graphics Card

Bus type PCI Express (x16 lanes)  
Maximum vertical refresh rate 85 Hz  
Display support Integrated 400 MHz RAMDAC



### Technical Specifications - Graphics

Display max resolution	2560 x 1600 digital, 2048 x 1536 analog	
Board display options	Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output	
Board configuration	<b>Specification</b>	<b>Description</b>
	Graphics Chip	RV610
	Core clock	650 MHz
	Memory clock	500 MHz
	Frame buffer	256 MB DDR2, 128 bit wide
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
Core power	21 W	
Compliance standards	EMC Emissions: a) FCC Part 15, Subpart B – Unintentional Radiators, Class B Computing Devices for Home & Office Use b) CISPR22: 1997/EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment c) Canadian Standard ICES-003 is equivalent to CISPR22 d) Taiwanese Standard BSMI e) Japanese VCCI f) Australian C-Tick g) Korean (MIC) EMC Immunity: CISPR 24:1997/EN 55024:1998 – Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement.	

ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	N/A

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

### Technical Specifications - Graphics

ATI Radeon HD 4550 DH PCIe x16 Graphics Card	Input/Output connectors	DMS-59 S-video connector	
	Board display options	Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output	
	Board configuration	<b>Specification</b>	<b>Description</b>
		Graphics Chip	RV710
		Core clock	600 MHz
		Memory clock	800 MHz
		Frame buffer	256 MB DDR2, 64 bit wide
	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
Display max resolution	1900 x 1200 digital, 2048 x 1536 analog		

#### ATI Radeon HD 4550 DH PCIe x16 Graphics Card display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	N/A

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish
Operating systems support	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows XP Professional or Windows XP Home 32*.

\* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit:

### Technical Specifications - Graphics

<http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Linux x86 and x86\_64 distributions using XFree86 or X.Org\*\*.

\*\* Linux drivers are available from ATI's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website: <http://www.hp.com/wwsolutions/linux/products/clients/> for support information.

Core power	21 W
Option kit contents	<ul style="list-style-type: none"> <li>● ATI Radeon HD 4550 DH PCIe x16 Graphics Card with full height bracket attached</li> <li>● DMS 59 to dual VGA Y cable</li> <li>● Software CD with graphics drivers</li> <li>● Low profile bracket to convert the card for using in a low profile chassis</li> <li>● Warranty documentation</li> </ul>
Compliance standards	<p>EMC Emissions:</p> <ul style="list-style-type: none"> <li>a) FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home &amp; Office Use</li> <li>b) CISPR22: 1997/EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment</li> <li>c) Canadian Standard ICES-003 is equivalent to CISPR22</li> <li>d) Taiwanese Standard BSMI</li> <li>e) Japanese VCCI</li> <li>f) Australian C-Tick</li> <li>g) Korean (KCC)</li> </ul> <p>EMC Immunity:</p> <p>CISPR 24:1997/EN 55024:1998 – Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement.</p>

ATI Radeon HD 4650 1 GB PCIe x16 Graphics Card	Bus type	PCI Express (x16 lanes)
	Maximum vertical refresh rate	85 Hz
	Display support	Integrated 400 MHz RAMDAC
	Display max resolution	2560 x 1600 digital, 2048 x 1536 analog

ATI Radeon HD 4650 1 GB PCIe x16 Graphics Card display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP



### Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R*
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60**

\* Max HDMI resolution is 1080p

\*\* Only supported when using a dual-link DVI connection

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

**Board display options** Supports two displays through any combination of two of the three output ports.

#### Board configuration

##### Specification

##### Description

Graphics Chip

RV730Pro

Core clock

600MHz

Memory clock

500 MHz

Frame buffer

1 GB DDR2, 128 bit wide

**Maximum power**

55 W

#### Languages supported

24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish

#### Operating systems support

Windows Vista Home Basic 32\*, FreeDOS

\* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit:

<http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Linux x86 and x86\_64 distributions using XFree86 or X.Org\*\*

\*\* Linux drivers are available from ATI's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website:

<http://www.hp.com/wwsolutions/linux/products/clients/> for support information.

#### Option kit contents

- ATI Radeon HD 4650 512MB PCIe x16 Graphics Card
- Software CD with graphics drivers
- Warranty documentation

#### Compliance standards

EMC Emissions:

### *Technical Specifications - Graphics*

a) CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment

#### EMC Immunity:

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

### Technical Specifications - Input Devices

HP USB Value Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.14 x 1.07 x 6.02 in (46.1 x 2.74 x 15.3 cm)
		Weight	1.3 lb(0.6 kg) minimum
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 12.5-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft PC 99 – 2001	Functionally compliant
		Languages	40 available
		Keycaps	Slim design
		Switch actuation	60-g nominal peak force with tactile feedback
		Switch life	10 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	N/A
		Cable length	1.5 m
		Microsoft PC 99 – 2001	Mechanically compliant
	Environmental	Acoustics	50-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	30 in (76 cm) on carpet, 5-drop sequence
		Drop (in box)	30 in (76 cm) on rigid surface, 10-drop sequence
	Approvals	ULcUL, FCC, CE, TUV/Bauart, VCCI, BSMI, C-Tick, KCC	
	Ergonomic compliance	N/A	

---

HP USB Optical Scroll Mouse	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	Weight	0.27 lb (0.12 kg)
	Cable length	72.8 in (185 cm)

---

HP Serial/Parallel PCI Card	Dimensions	9.5 x 2.25 x 7.5 in (24.13 x 5.71 x 19.05)
	Weight	2.2 lbs (1 kg)

---

### Technical Specifications - Hard Drives

#### Serial ATA Hard Drives 80 GB (7200 rpm)

<b>Capacity</b>	80,026,361,856 bytes	
<b>Height</b>	1 in (2.54 cm)	
<b>Width</b>	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
<b>Interface</b>	Serial ATA (3.0 Gb/s)	
<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
<b>Buffer</b>	8 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
	<b>Average</b>	11 ms
	<b>Full-Stroke</b>	21 ms
<b>Rotational Speed</b>	7,200 rpm	
<b>Logical Blocks</b>	156,301,488	
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)	

#### 160 GB

<b>Capacity</b>	160,041,885,696 bytes	
<b>Height</b>	1 in (2.54 cm)	
<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
<b>Interface</b>	Serial ATA (3.0 Gb/s)	
<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
<b>Buffer</b>	8 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
	<b>Average</b>	11 ms
	<b>Full-Stroke</b>	21 ms
<b>Rotational Speed</b>	7,200 rpm	
<b>Logical Blocks</b>	312,581,808	
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)	

#### 320 GB

<b>Capacity</b>	320,072,933,376 bytes	
<b>Height</b>	1 in (2.54 cm)	
<b>Width</b>	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
<b>Interface</b>	Serial ATA (3.0 Gb/s)	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s	
<b>Buffer</b>	8 MB	

### Technical Specifications - Hard Drives

500 GB	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
		<b>Average</b>	11 ms
		<b>Full-Stroke</b>	21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	625,142,448	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
	<b>Capacity</b>	500,107,862,016 bytes	
	<b>Height</b>	1 in (2.54 cm)	
	<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
	<b>Interface</b>	Serial ATA (3.0 Gb/s)	
	<b>Synchronous Transfer Rate</b> (Maximum)	3.0 Gb/s	
	<b>Buffer</b>	8 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
		<b>Average</b>	11 ms
		<b>Full-Stroke</b>	21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	976,773,168	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### Technical Specifications - Optical Storage

SATA DVD-ROM Drive	Height	5.25-inch, half-height, tray-load			
	Orientation	Either horizontal or vertical			
	Interface type	SATA/ATAPI			
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)			
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)			
	Weight (max)	2.6 lb (1.2 kg)			
	Read speeds	DVD+R/-R/+RW/-RW/+R DL /-R DL	Up to 8X		
		DVD-ROM	Up to 16X		
		DVD-RAM	Up to 4X		
		CD-ROM, CD-R	Up to 48X		
		CD-RW	Up to 32X		
	Removable Storage - Media Compatibility - DVD-ROM	Media	Read	Write	
		CD-ROM	Yes	No	
		CD-R	Yes	No	
		CD-RW	Yes	No	
		DVD-ROM	Yes	No	
		DVD-ROM DL	Yes	No	
		DVD-RAM	Yes	No	
		DVD+R	Yes	No	
		DVD+R DL	Yes	No	
		DVD+RW	Yes	No	
		DVD-R	Yes	No	
		DVD-RW	Yes	No	
		DVD-R DL	Yes	No	
		Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)	
			Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)	
Cache Buffer	2 MB (minimum)				
Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)				
Power					
	Source	SATA DC power receptacle			
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p			
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC -< 600 mA typical, < 1400 mA maximum			

### Technical Specifications - Optical Storage

Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

#### HP SATA SuperMulti LightScribe DVD Writer Drive

Height	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Disc capacity	8.5 GB DL or 4.7 GB standard	
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
Weight (max)	2.6 lb (1.2 kg)	
Write speeds	DVD-RAM	Up to 12X
	DVD+R	Up to 16X
	DVD+RW	Up to 8X
	DVD+R DL	Up to 8X
	DVD-R DL	Up to 8X
	DVD-R	Up to 16X
	DVD-RW	Up to 6X
	CD-R	Up to 48X
	CD-RW	Up to 32X
Read speeds	DVD-RAM	Up to 12X
	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 8X
	DVD-ROM DL	Up to 8X
	DVD-ROM, DVD+R, DVD-R	Up to 16X
	CD-ROM, CD-R	Up to 48X
	CD-RW	Up to 32X
	Access times (typical reads, including setting)	Random
Full Stroke		DVD: < 250 ms (seek), CD: < 210 ms (seek)
Power	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

### Technical Specifications - Environmental Data

**Eco-Label Certifications & declarations** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- Korea Eco-label

### Ultra-Slim Desktop

**System Configuration** The configuration used for the Energy Consumption and Declared Noise Emissions data for the Ultra-slim Desktop model is based on a typically configured product

#### Energy Consumption

	115 VAC	230 VAC	100 VAC
Normal Operation	46.563W	45.595W	45.126W
Sleep (Energy Star low power mode)	5.647W	5.647W	5.445W
Off	2.302W	2.301W	2.054W

#### Heat Dissipation\*

	115 VAC	230 VAC	100 VAC
Normal Operation	159 BTU/hr	156 BTU/hr	154 BTU/hr
Sleep	19 BTU/hr	19 BTU/hr	19 BTU/hr
Off	8 BTU/hr	8 BTU/hr	7 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.6	26
Fixed Disk (random writes)	4.0	30

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

#### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).



### Technical Specifications - Environmental Data

- This product is in compliance with the IEEE 1680 (EPEAT) standard at the level, see: [www.epeat.net](http://www.epeat.net)
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0% post consumer recycled plastic (by wt.)
- This product is 92.4% recyclable when properly disposed of at end of life.

#### Packaging Materials

- External:
  - Corrugated Carton 2260 g
- Internal:
  - EPE-Expanded Polyethylene 115 g
  - Polyethylene low density foam 15 g
- Corrugated Carton packaging material is made from 100% recycled content.
- EPE-Expanded Polyethylene packaging material is made from 100% recycled content.
- Polyethylene low density packaging material is made from 100% recycled content.

### Ultra-Slim Desktop, Small Form Factor, Convertible Minitower

#### RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: [http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances

### Technical Specifications - Environmental Data

#### Packaging

- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

© Copyright 2009 Hewlett-Packard Development Company, L.P.

All rights reserved.

The information contained herein is subject to change without notice.

Intel and Pentium are U.S. registered trademarks of Intel Corporation. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.